

FJD EASY CONTROL

WIRELESS AUTOSTEER CONTROL

Go Wireless, Go Easy



SUREFIRE

CONTROL YOUR AUTOSTEERING KIT WITH BUTTON-CLICKING CERTAINTY WHEN THE TOUCHSCREEN IS OUT OF REACH OR HARD TO ENGAGE IN A DUSTY OR SHAKY CAB.



SMOOTH

SEAMLESSLY SWITCH BETWEEN PHYSICAL AND VIRTUAL BUTTONS FOR SMOOTHER WORKFLOW.



CONSISTENT

ALL THE ICONS ON THE WIRELESS CONTROLLER MATCH THOSE ON THE TOUCHSCREEN, SO EVERYTHING FEELS FAMILIAR ON DAY 1.



RUGGED

BUILT WITH ENDURABILITY AND SAFETY IN MIND, FJD EASY CONTROL IS IP65-RATED AND ANSWERS YOUR 100,000TH CLICK AND BEYOND.




CONVENIENT

UP-TO-30M WIRELESS COMMUNICATION AND COMPACT DESIGN MAKE IT EASY TO INSTALL ANYWHERE IN THE CAB.



ANTI-LOST

THE TOUCHSCREEN WILL PROMPT A NOTIFICATION WHEN THE CONTROLLER IS DISCONNECTED. FIX IT ANYWHERE WITH THE STRAP THAT COMES WITH IT, SO YOU DON'T LOSE IT EASILY.

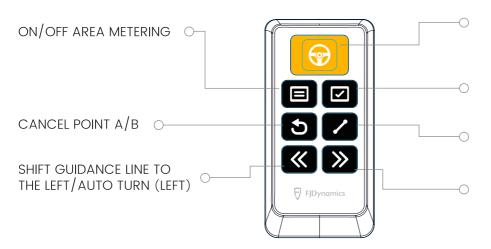

ON/OFF AUTO MODE

CUSTOMIZE (SAVE GUIDANCE LINE, OPEN ISOBUS WINDOW, ETC.)

SELECT POINT A & B

SHIFT GUIDANCE LINE TO THE RIGHT/AUTO TURN (RIGHT)

SPECS

Model	AT-EC01
Protocol	BT5.0
Distance	≥5 m
Power Supply	2.2-3.6 V
Current	≤7.0 mA
Power	IP65
IP Rating	IP65
Operating Temperature	-25 °C-65 °C
Storage Temperature	-25 °C -65 °C
Relative Humidity	20%-90%
Battery Life	AAA*2, 1 year

Number of Button	7
IP Rating	IP65
Operating Temperature	-2 5°C -6 5°C
Storage Temperature	-2 5°C -6 5°C
Relative Humidity	20%-90%
Battery Life	AAA*2, 1 year
Number of Button	7
Button Life	≥100,000
Device Size	120 x 60 x 22 mm
Device Size Package Size	223 v 1/18 v /18 mm

Compatible with FJD Autosteering Kits manufactured in 2022 or later.

Free Quote:sales.global@fjdynamics.com
Address:15 Scotts Road #03-12 15 Scotts, Singapore



